


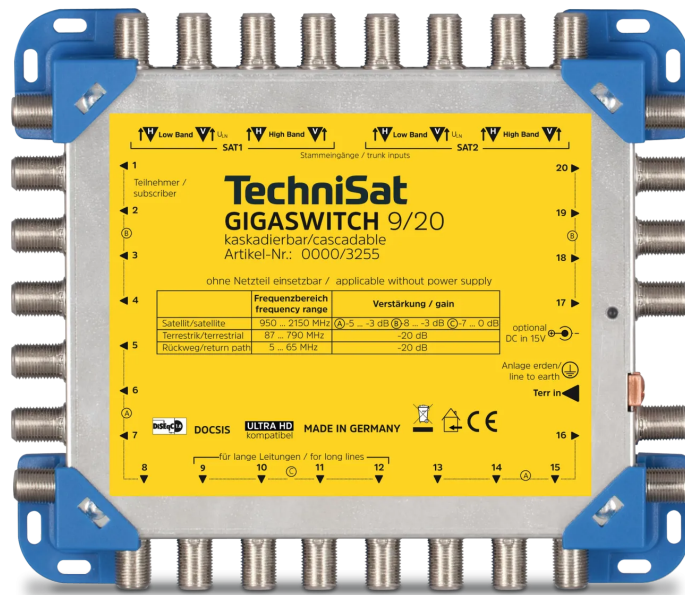

GIGASWITCH 9/20

Compact multiswitch for 20 participants for distribution of 2 orbit positions and terrestrial signals

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032552	blue/yellow	0000/3255	743 g	448 g	17,4 x 3,5 x 15 cm	26,5 x 6 x 15,5 cm

TOP FEATURES

Gain in satellite range	Tilt gain	For 2 quad LNB's
Energy saving - usable without mains adapter	Input for terrestrial signals	Average tap loss for sat path only 5 dB
Terrestrial: 87 ... 790 MHz (-20 dB)	Return path: 5 ... 65 MHz (-20 dB)	All outputs are return path compatible
Isolation: 25 dB		

AMBIENT OPERATING CONDITIONS

Ambient temperature: -25 ... 45 °C
Humidity: 10 ... 70 %

AMPLIFICATION

Sat: -5 dB typical
Terrestrial: -20 dB
Return path: -20 dB

DECOUPLING

Output: > 25 dB

POWER SUPPLY

Nominal voltage: 230 V
Frequency: 50 Hz
Mains adapter: external 15V/1,2A

RECEPTION RANGE

Sat: 950 ... 2.150 MHz
Terrestrial: 5 ... 790 MHz
Return path: 5 ... 68 MHz

TECHNICAL DATA

Satellite inputs: 8
Terrestrial input: 1
Outputs: 20
Distribution length: max. 70 m

SCOPE OF DELIVERY

GIGASWITCH 9/20, power supply (15V/1,2A), instruction manual