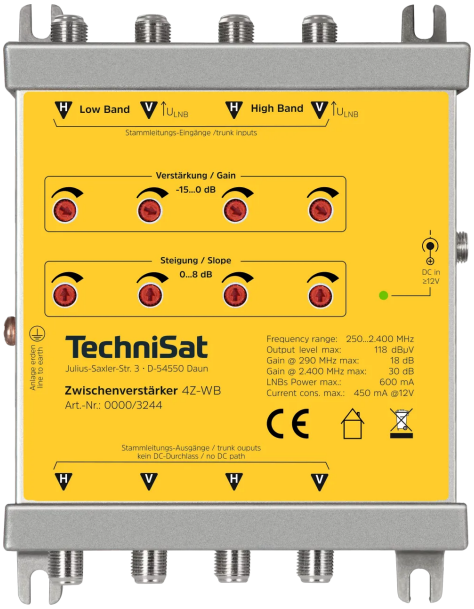


Line Amplifier 4Z-WB

4-way line amplifier

Colour	EAN	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
silver/yellow	4019588032446	0000/3244	680 g	450 g	15 x 10,5 x 3,7 cm	24 x 12,5 x 5 cm

AMBIENT OPERATING CONDITIONS

- Ambient temperature: -25 bis 55 °C
- Humidity: 10 - 75 %

AMPLIFICATION

- Sat: 18 - 30 dB

DECOUPLING

- Trunks: 40 dB

GENERAL CHARACTERISTICS

- Top features: Compensates the attenuation of 80 meters of RG6 cable
- Top features: Frequenzbereich: 250 - 2400 MHz
- Top features: Verstärkung einstellbar (max. 30 dB bei 2400 MHz)
- Top features: Schräglage einstellbar 0 - 8 dB
- Top features: Für 2 Wideband-LNBs oder 1 Quattro-LNB

POWER SUPPLY

- Nominal voltage: 230 V DC
- Frequency: 50 Hz
- Mains adapter: external (DC 12 V / 2,0 A)
- Power consumption: typ. 560 mA @12V

RECEPTION RANGE

- Sat: 250 - 2.400 MHz

TECHNICAL DATA

- Satellite inputs: 4
- Distribution length: 80 m

SCOPE OF DELIVERY

- Line Amplifier 4Z-WB, power supply, instruction manual