


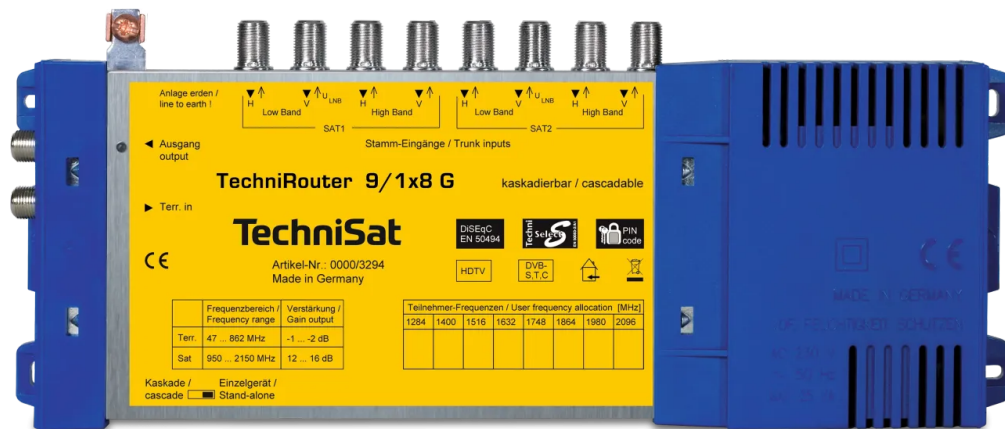

TECHNIROUTER 9/1x8 G

Digital single-cable solution with PIN code technology for the distribution of signals from two satellite positions with a cable harness using an existing cable structure

EAN	Colour	Item no.	Weight (Box)	Weight	Box
4019588032941	blue/yellow	0000/3294	800 g	500 g	31,8 x 20 x 4,5 cm

AMBIENT OPERATING CONDITIONS

Humidity: 10 ... 75 %

Ambient temperature: -25 ... 55 °C

GENERAL CHARACTERISTICS

Top features: Einspeisung von digitalen Sat-Signalen in vorhandene Kabelstrukturen

Top features: Keine weitere Kabelverlegung erforderlich

Top features: 2 Orbitpositionen ohne Einschränkung mit 2 Quatro-LNB zu empfangen

Top features: Eingang zum Empfang von Terrestrischen Signalen

SINGLE-CABLE OUTPUT

Output frequency: 47 ... 2.150 MHz

Number of output channels: 8

Frequency of the output channels: 1284, 1400, 1516, 1632, 1748, 1864, 1980, 2096 MHz

Frequency SAT: 950 ... 2.150 MHz

Frequency DVB-T: 47 ... 862 MHz

AMPLIFICATION

Sat: 13 ... 18 dB

Terrestrial: -1 dB

POWER SUPPLY

Mains adapter: internal

Frequency: 50 Hz

Nominal voltage: 230 V

TECHNICAL DATA

Satellite inputs: 8

Terrestrial input: 1

Number of cable connections: 1

Subscribers per cable: maximal 8

DECOUPLING

Trunks: 45 dB

RECEPTION RANGE

Sat: 950 ... 2.150 MHz

Terrestrial: 47 ... 862 MHz

SCOPE OF DELIVERY

TECHNIROUTER 9/1x8 G, Bedienungsanleitung, Netzkabel

Test Results TECHNIROUTER 9/1x8 G

SATVISION	
Technisat TechniRouter 9/1x8 G	
SEHR GUT	93,0 %
4 Unicable Multischalter für 2 Orbitalpositionen im Vergleich	Heft 06/2009

SATVISION (06/2009)

SATVISION	
Technisat TechniRouter 9/1x8 G	
ENERGIESPARSIEGER Gerät mit dem geringsten kombinierten Energieverbrauch	
4 Unicable Multischalter für 2 Orbitalpositionen im Vergleich	Heft 06/2009

SATVISION
Energiesparsieger
(06/2009)