


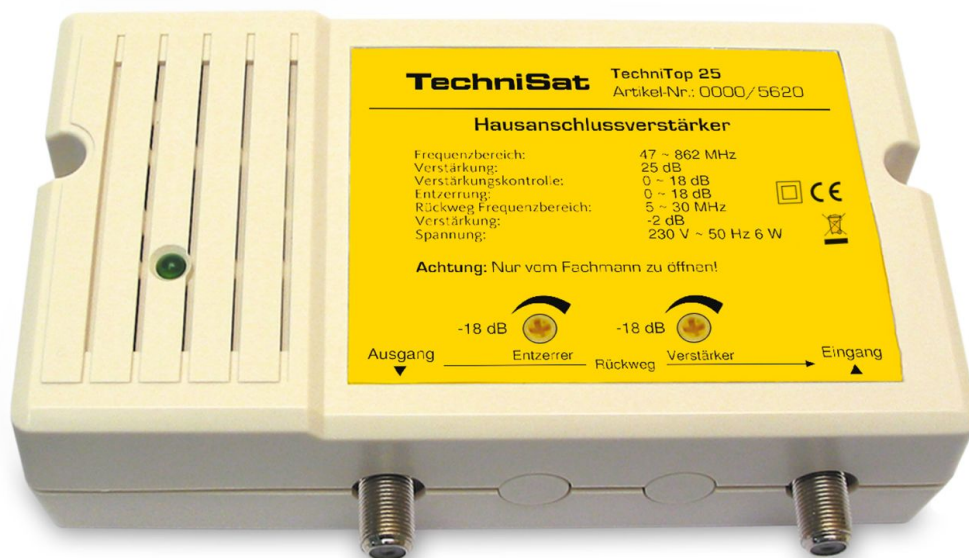

TechniTop 25

CATV amplifier with 25 dB gain and return path of 5-30 MHz.

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588056206	beige	0000/5620	600 g	496 g	16 x 10,6 x 4,3 cm	13,3 x 17 x 5,1 cm

GENERAL CHARACTERISTICS

Top features: Dämpfung und Entzerrung einstellbar

OUTPUT LEVEL

Standard IMA UHF: 111 dB

Standard IMA UHF: 111 dB

IMA DIN 45004B VHF: 102 dB

IMA DIN 45004B UHF: 102 dB

POWER REQUIREMENT

Power input: 4 W

POWER SUPPLY

Nominal voltage: 230 V

Frequency: 50 ... 60 Hz

Mains adapter: internal

RANGE OF ADJUSTMENT

Attenuator: 0 ... 18 dB

Equaliser: 0 ... 18 dB

TECHNICAL DATA

Frequency range: 47 ... 862 MHz

Frequency range return path: 5 ... 30 MHz

Amplification: 25 dB

Noise factor: ≥ 7 dB

Shielding factor: ≥ 75 dB

Connector type: F female

SCOPE OF DELIVERY

TechniTop 25