


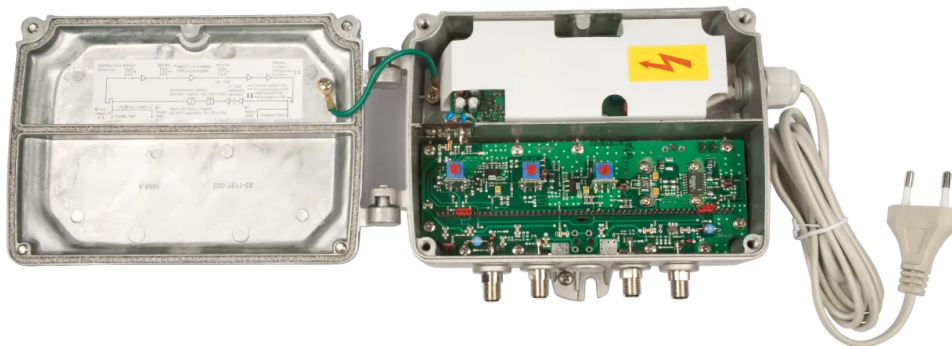

# TechniTop HAV 35 broadband amplifier

Building connection amplifier for HDTV and DVB-T operation

| EAN           | Colour | Item no.  | Weight (Box) | Weight | Device (W x H x D)   | Box                  |
|---------------|--------|-----------|--------------|--------|----------------------|----------------------|
| 4019588156081 | silver | 0001/5608 | 1,2 kg       | 1,2 kg | 18,5 x 7,1 x 13,6 cm | 27,5 x 9,8 x 18,7 cm |

## OUTPUT LEVEL

Standard IMA UHF: 111 dB

Standard IMA UHF: 111 dB

IMA DIN 45004B VHF: 102 dB

IMA DIN 45004B UHF: 102 dB

## RANGE OF ADJUSTMENT

Attenuator: 0 ... 20 dB

Equaliser: 0 ... 18 dB

## POWER REQUIREMENT

Power input: 9 W

## TECHNICAL DATA

Frequency range: 5 ... 862 MHz

Frequency range return path: 5 ... 65 MHz  
wählbar mit Modul

Amplification: 35 dB

CSO / CTB: 108

Noise factor:  $\leq 7$  dB

Shielding factor:  $\geq 80$  dB

Output + input measuring points: -20 dB ( $\pm 2,5$ )

Protection class: IP 54

Connector type: F-Buchsen

Impedance: 75  $\Omega$

Return loss:  $\geq 18$  dB

Interstage attenuator: 0 dB

## POWER SUPPLY

Mains adapter: internal

Nominal voltage: 230 V

Frequency: 50 ... 60 Hz

## SCOPE OF DELIVERY

BK-Verstärker TechniTop HAV 35,  
Bedienungsanleitung