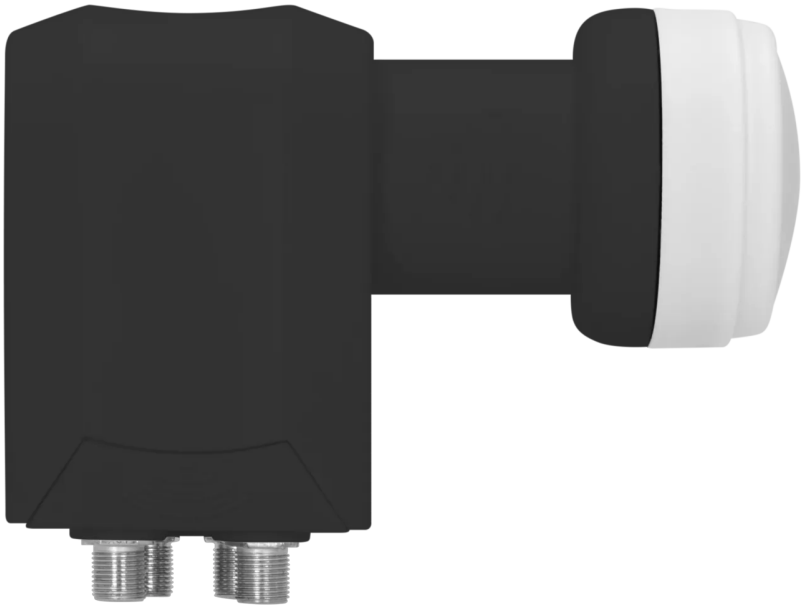


Universal-Quattro-Switch-LNB

Digital LNB with 4 legacy outputs

Colour	EAN	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
black	4019588083905	0000/8390	234 g	200 g	5,7 x 10,1 x 12,8 cm	10,2 x 13,8 x 6,1 cm

TOP FEATURES

- For 4 participant
- F connectors
- Feed ø 40 mm
- LTE interference-safe

LOCAL OSCILLATOR

- Low band: 9,75 GHz
- High band: 10,6 GHz
- Accuracy: ± 1 MHz
- Temperature drift: ± 2,5 MHz
- Phase noise: -85 @10kHz

FILTER-NAVIGATION

- Connections: USB
- Number satellites: 1
- Number participants: 4
- Operating mode: Rechargeable battery

LNB CONTROL

- Vertical: 10,5 ... 14,5 V
- Horizontal: 16 ... 22 V
- Band switch: 22 kHz

AMBIENT OPERATING CONDITIONS

- Humidity: 10 ... 95 %
- Ambient temperature: -40 ... 70 °C

INPUT FREQUENCY RANGE

- Low band: 10,7 ... 11,7 GHz
- High band: 11,7 ... 12,75 GHz

NOISE FACTOR

- Noise figure: typ. 0,75 dB

OUTPUT FREQUENCY RANGE

- Low band: 950 ... 1.950 MHz
- High band: 1.100 ... 2.150 MHz

POWER SUPPLY

- Power consumption: typ. 150 mA

PREPARED FOR

- Number of orbit positions: 1
- Number of clients: 4

TECHNICAL DATA
Impedance: 75 Ω
Feed reception: 40 mm
Connector type: F female
Outputs: 4
Amplification: 60 ... 65 dB

SCOPE OF DELIVERY
Universal-Quattro-Switch-LNB