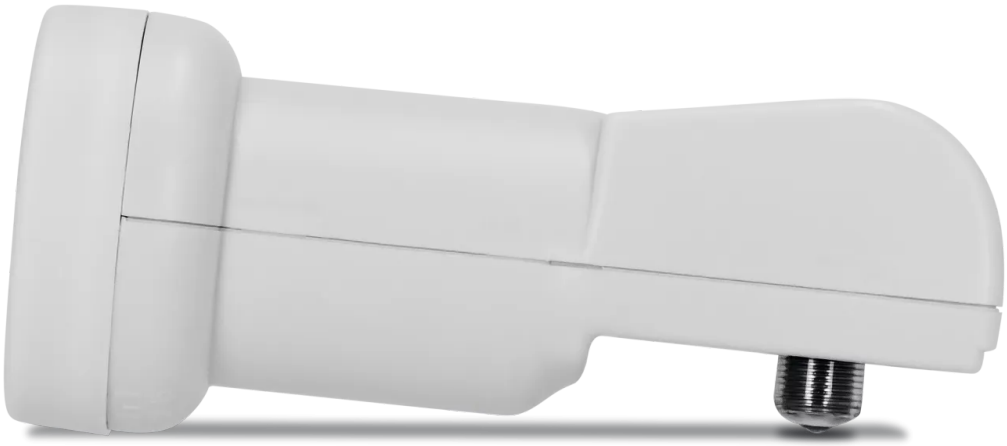


Universal-Twin-LNB

Digital LNB for 2-subscriber reception

Colour	EAN	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
white	4019588208827	0020/8882	180 g	102 g	5,4 x 5,4 x 12,3 cm	6 x 6 x 13,2 cm

TOP FEATURES

- Ultra low noise
- Weather protection housing
- Feed ø 40 mm

LOCAL OSCILLATOR

- Low band: 9,75 GHz
- High band: 10,6 GHz
- Accuracy: ± 1 MHz
- Temperature drift: ± 0,5 MHz
- Phase noise: -75 @10kHz

LNB CONTROL

- Band switch: 22 kHz
- Vertical: 10,5 ... 14 V
- Horizontal: 16 ... 23 V

AMBIENT OPERATING CONDITIONS

- Ambient temperature: -40 ... 70 °C
- Humidity: 10 ... 95 %

INPUT FREQUENCY RANGE

- Low band: 10,7 ... 11,7 GHz
- High band: 11,7 ... 12,75 GHz

NOISE FACTOR

- Lower frequency range: 0,7 dB max.
- Upper frequency range: 0,7 dB max.
- Noise figure: typ. 0,1 dB

OUTPUT FREQUENCY RANGE

- Low band: 950 ... 1.950 MHz
- High band: 1.100 ... 2.150 MHz

POWER SUPPLY

- LNB voltage supply: 10,5 ... 23 V
- Power consumption: max. 140 mA

PREPARED FOR

- Number of clients: 2
- Number of orbit positions: 1

TECHNICAL DATA

- Outputs: 2
- Impedance: 75 Ω
- Feed reception: 40 mm
- Connector type: F female
- Amplification: 58 ... 64 dB

SCOPE OF DELIVERY
Universal-Twin-LNB