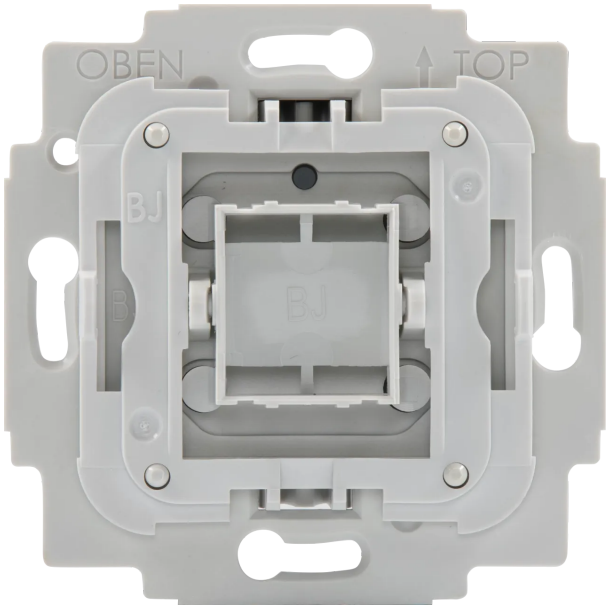


On/Off switch flush mount, BJ

Compatible with Busch-Jaeger switch ranges

Colour	EAN	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
light grey	4019588394995	0300/9499	130 g	70 g	7 x 7 x 4,5 cm	11,5 x 10,5 x 5,8 cm

TOP FEATURES

- Integration/control with TechniSat CONNECT
- Device for flush mounting in standard device boxes
- Compatible with Busch-Jaeger switch ranges
- Measuring of energy consumption
- Integrated scene control
- Integrated Z-Wave ™ repeater function
- Electronic overload protection

AMBIENT STORAGE CONDITIONS

- Temperature: -20 ... 60 °C
- Humidity: 5 ... 90 %

AMBIENT OPERATING CONDITIONS

- IP class: 20
- Ambient temperature: 5 ... 35 °C
- Humidity: 10 ... 75 %

FUNK COMMUNICATION

- Telecommunication: Z-Wave Plus
- Security S2: Yes
- SmartStart: Yes
- Range inside: max. 40 m
- operating frequency: 868,42 MHz
- Repeater function: Yes

POWER SUPPLY

- Frequency: 50 Hz ± 10 %
- Nominal voltage: 230 V ± 10 %
- Effective output: 1,15 W
- Power consumption: < 2 mA (without load)

SCOPE OF DELIVERY

Circuit-breaker insert, compensation frame, assembly instructions, fastening screws
