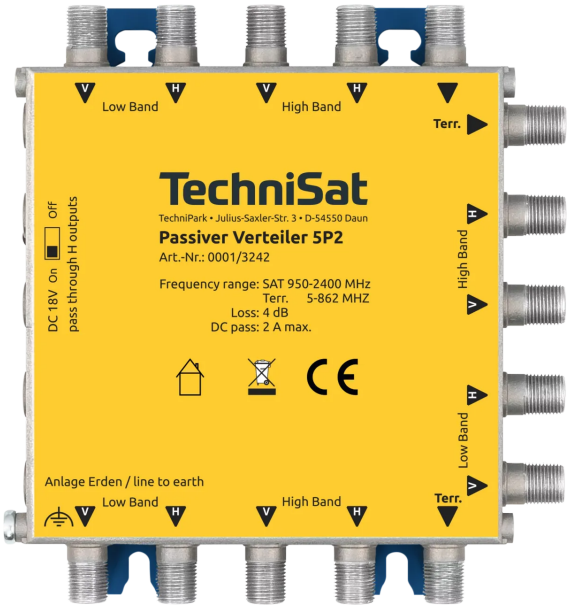


Passive Splitter 5P2

2-way splitter for 1 orbit position

Colour	EAN	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
silver/yellow	4019588132429	0001/3242	438 g	392 g	12,6 x 13,5 x 3 cm	16 x 14,5 x 3,8 cm

TOP FEATURES

Distributes Sat signal into 2 routes with only 4 dB attenuation

AMBIENT OPERATING CONDITIONS

Ambient temperature: -20 50 °C

AMPLIFICATION

Sat: -4 dB

Terrestrial: -4 dB

POWER SUPPLY

Type of power supply: internal

Nominal voltage: 230 V

LNB voltage supply: 14 18 V

Frequency: 50 / 60 Hz

PREPARED FOR

Number of orbit positions: 1

RECEPTION RANGE

Sat: 950 ... 2.400 MHz

Terrestrial: 5 ... 862 MHz

TECHNICAL DATA

Satellite inputs: 4

Terrestrial input: 1

Distribution length: 100 m

TRANSMISSION LOSS

Sat: 4 dB

Terrestrial: 4 dB

SCOPE OF DELIVERY