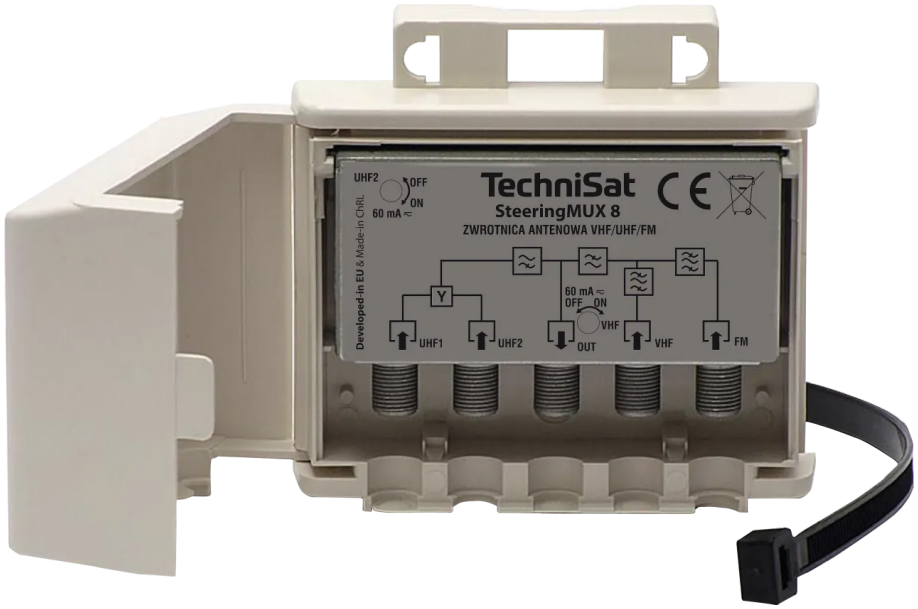


STEERINGMUX 8

VHF/UHF antenna diplexer for DVB-T2

Colour	EAN	Item no.
black	4019588060340	0000/6034

RECEPTION RANGE

- UKW: 87,5 ... 108 MHz
- VHF III E5-E12: 174 ... 230 MHz
- UHF E21-E69: 470 ... 790 MHz

AMBIENT OPERATING CONDITIONS

- Ambient temperature: -10 ... 55 °C
- IP class: 53
- Humidity: 10 ... 75 %

TECHNICAL DATA

- Input: 4
- Connector type: F
- Impedance: 75 Ω
- Output level: 115
- Level attenuation: 20 dB every input

GENERAL CHARACTERISTICS

- Top features: Four signal inputs 2 x UHF, VHF, FM/DAB+
- Top features: One signal output directly to TV or decoder
- Top features: DC pass 60 mA
- Top features: Channels: VHF/FM, VHF: 6-12, UHF: 21-60
- Top features: IP 53 class
- Top features: Waterproof housing

AMPLIFICATION

- UKW: 30 dB
- VHF I: 30 dB
- VHF III: 30 dB
- UHF: 34 dB

POWER SUPPLY

- Mains adapter: internal
- Nominal voltage: 230 V ~
- Frequency: 50 Hz
- Effective output: 7 W

SCOPE OF DELIVERY

STEERINGMUX 8 crossover, protective housing, clamp for mounting e.g. on an antenna mast, operating instructions