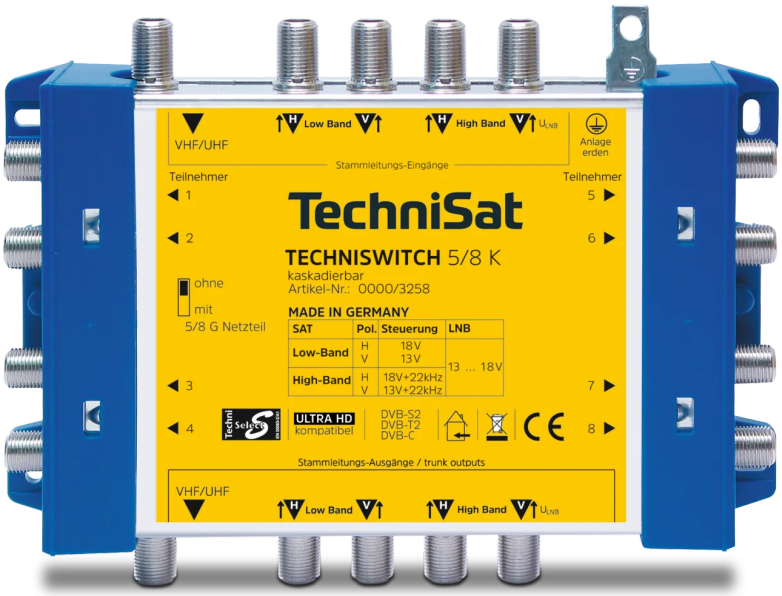


TECHNISWITCH 5/8 K

Multi-switch system with connection possibility of 4 levels for distribution to up to 24 participants

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032583	blue/yellow	0000/3258	374 g	374 g	17,1 x 12,6 x 3,32 cm	17,5 x 18,5 x 3,9 cm

AMBIENT OPERATING CONDITIONS

- Ambient temperature: -25 ... 55 °C

AMPLIFICATION

- Sat: -4 ... -2 dB
- Terrestrial: 1 ... 4 dB

DECOUPLING

- Output: > 35 dB

GENERAL CHARACTERISTICS

- Top features: For distribution of one satellite position
- Top features: Up to 24 subscribers can be connected
- Top features: For connecting a Quatro LNB
- Top features: Up to 100 m distribution length due to inclination compensation
- Top features: Energy saving - no mains adapter for operation
- Top features: No attenuation in satellite range

RECEPTION RANGE

- Sat: 950 ... 2.150 MHz
- Terrestrial: 47 ... 862 MHz

TECHNICAL DATA

- Satellite inputs: 4
- Terrestrial input: 1
- Outputs: 8
- Distribution length: max. 100 m

TRANSMISSION LOSS

- Sat: 2 ... 5 dB
- Terrestrial: 2 ... 3 dB

SCOPE OF DELIVERY

- TechniSwitch 5/8 K, manual