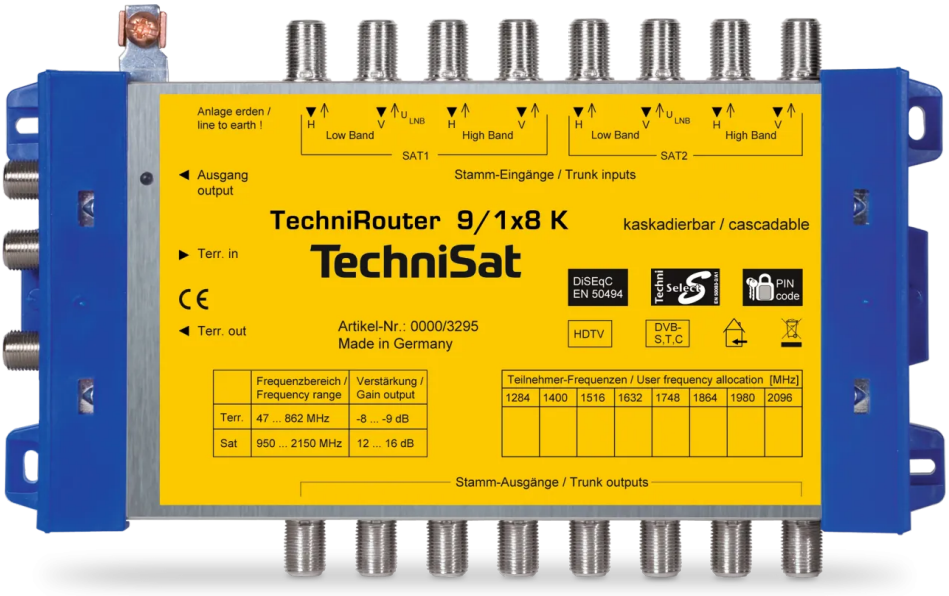


TECHNIROUTER 9/1x8 K

Digital single-cable solution with PIN code technology for the distribution of signals from two satellite positions with a cable harness using an existing cable structure

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032958	blue/yellow	0000/3295	600 g	400 g	21,5 x 13 x 3,2 cm	31,8 x 20 x 4,5 cm

RECEPTION RANGE

- Sat: 950 ... 2.150 MHz
- Terrestrial: 47 ... 862 MHz

TRANSMISSION LOSS

- Sat: 3 ... 5 dB
- Terrestrial: 2 ... 3 dB

SINGLE-CABLE OUTPUT

- Output frequency: 47 ... 2.150 MHz
- Number of output channels: 8
- Frequency of the output channels: 1284, 1400, 1516, 1632, 1748, 1864, 1980, 2096 MHz
- Frequency SAT: 950 ... 2.150 MHz
- Frequency DVB-T: 47 ... 862 MHz

AMBIENT OPERATING CONDITIONS

- Ambient temperature: -25 ... 55 °C
- Humidity: 10 ... 75 %

TECHNICAL DATA

- Satellite inputs: 8
- Terrestrial input: 1
- Number of cable connections: 1
- Subscribers per cable: maximal 8

GENERAL CHARACTERISTICS

- Top features: Einspeisung von digitalen Sat-Signalen in vorhandene Kabelstrukturen
- Top features: Keine weitere Kabelverlegung erforderlich
- Top features: 2 Orbitpositionen ohne Einschränkung mit 2 Quatro-LNB zu empfangen
- Top features: Eingang zum Empfang von Terrestrischen Signalen

DECOUPLING

- Trunks: 45 dB

AMPLIFICATION

- Sat: 13 ... 18 dB
- Terrestrial: -8 dB

POWER SUPPLY

- Mains adapter: über Grundeinheit

SCOPE OF DELIVERY

TechniRouter 9/1x8 K, Bedienungsanleitung