


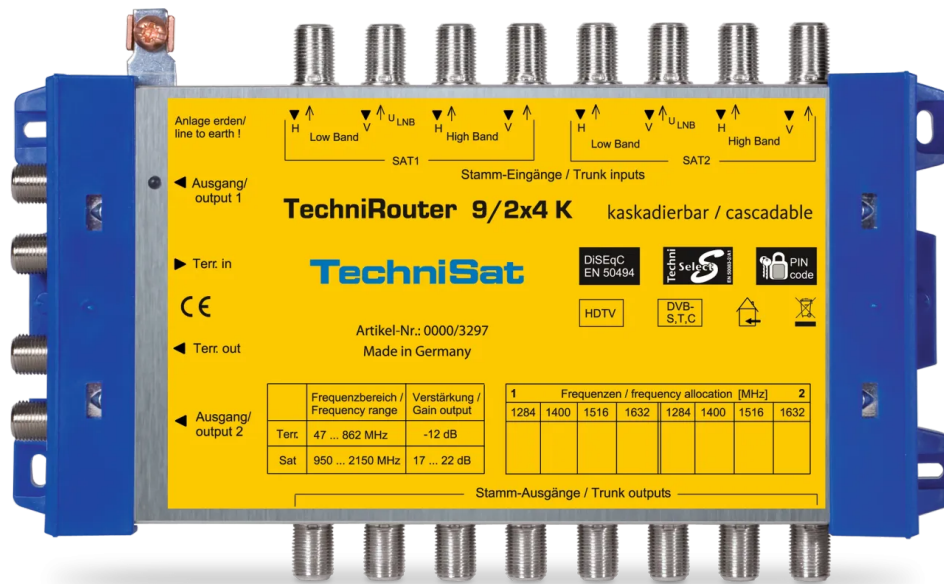

TECHNIROUTER 9/2x4 K

Digital single-cable solution for two orbital positions (with PIN code technology)

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032972	blue/yellow	0000/3297	700 g	400 g	21,6 x 12,7 x 3,1 cm	31,3 x 20 x 4,5 cm

AMBIENT OPERATING CONDITIONS

Ambient temperature: -25 ... 55 °C

Humidity: 10 ... 75 %

GENERAL CHARACTERISTICS

Top Features: Einspeisung von digitalen Sat-Signalen in vorhandene Kabelstrukturen

Top Features: Keine weitere Kabelverlegung erforderlich

Top Features: 2 Orbitpositionen ohne Einschränkung mit 2 Quatro-LNB zu empfangen

Top Features: Eingang zum Empfang von Terrestrischen Signalen

SINGLE-CABLE OUTPUT

Output frequency: 47 ... 2.150 MHz

Number of output channels: 2 x 4

Frequency of the output channels: 1284, 1400, 1516, 1632 MHz

Frequency SAT: 950 ... 2.150 MHz

Frequency DVB-T: 47 ... 862 MHz

AMPLIFICATION

Sat: 17 ... 22 dB

Terrestrial: -12 dB

POWER SUPPLY

Mains adapter: über Grundeinheit

TECHNICAL DATA

Satellite inputs: 8

Terrestrial input: 1

Number of cable connections: 2

Subscribers per cable: maximal 4

DECOUPLING

Trunks: 45 dB

RECEPTION RANGE

Sat: 950 ... 2.150 MHz

Terrestrial: 47 ... 862 MHz

TRANSMISSION LOSS

Sat: 3 ... 5 dB

Terrestrial: 2 ... 3 dB

SCOPE OF DELIVERY

TechniRouter 9/2x4 K, Instruction manual
