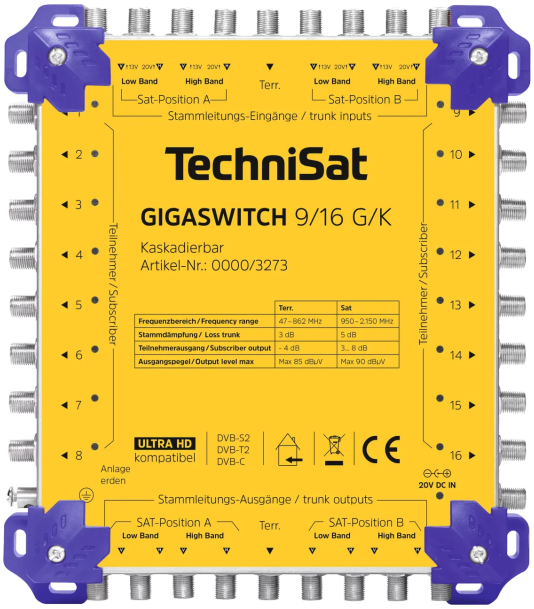


GIGASWITCH 9/16 G/K

Multi-switch system with the option to connect 8 IF levels (satellite blocks) and one terrestrial input for distribution to up to 16 subscribers

EAN	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032736	0000/3273	1,14 kg	730 g	19,4 x 21,7 x 4,4 cm	27 x 8,5 x 22,5 cm

TOP FEATURES

- Satellite inputs: 8
- Terrestrial inputs: 1
- Satellite main outputs: 8
- Terrestrial main outputs: 1
- Polar pattern attenuation: 5 dB
- Terrestrial signal attenuation: 3 dB
- Outputs: 16
- DiSEqC 1.0 / 1.1 / DiSEqC 2.0

FILTER-NAVIGATION

- Number participants: 16

AMPLIFICATION

- Sat: 3 ... 8 dB
- Terrestrial: -4 dB

DECOUPLING

- Output: > 30 dB
- Trunks: > 30 dB

GENERAL CHARACTERISTICS

- Top features: Can be expanded to include up to 2 cascades
- Top features: Without attenuation in the satellite band
- Top features: With tilt compensation
- Top features: For 2 Quattro LNBs

POWER SUPPLY

- Effective output: 20 V DC 1,2A 24W W
- Mains adapter: extern
- Frequency: 50 ... 60 Hz
- Nominal voltage: 20V DC, 1.2A,24W V

RECEPTION RANGE

- Sat: 950 ... 2.150 MHz ,Eingangspegel Sat max.: 90dB
- Terrestrial: 47 ... 862 MHz ,Eingangspegel Terr. max.: 85dB

TECHNICAL DATA
Satellite inputs: 8
Terrestrial input: 1
Outputs: 16

SCOPE OF DELIVERY
GIGASWITCH 9/16 G/K, plug-in power supply, user manual