


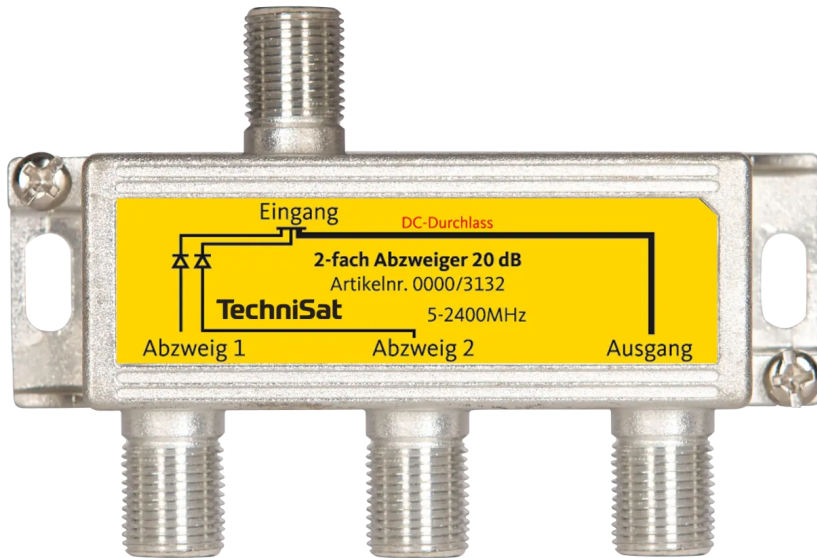

2-way SAT tap 20 dB

Broadband 2-way tap, 20 dB

EAN	Colour	Item no.
4019588031326	silver	0000/3132

DECOUPLING 5 - 862 MHz: > 40 dB 950 - 1750 MHz: > 35 dB 1750 - 2150 MHz: > 26 dB	GENERAL CHARACTERISTICS Top features: Screening factor class A, EN 50083 Top features: Broadband using from 5 to 2.400 MHz Top features: diode decoupled Top features: DC path through on trunk Top features: TECHNIROUTER-compatible	RETURN LOSS 5 - 862 MHz: > 10 dB 950 - 1750 MHz: > 10 dB 1750 - 2150 MHz: > 10 dB
TAP LOSS 5 - 862 MHz: 20 dB (± 1,5) 950 - 1750 MHz: 20 dB (± 2) 1750 - 2400 MHz: 20 dB (± 2,5)	TECHNICAL DATA Input: 1 Outputs: 3 (1+2) Frequency range: 5 ... 2.400 MHz Shielding factor: ≥ 75 dB EN 50083-2 (Class A) Connector type: F female Impedance: 75 Ω	TRANSMISSION LOSS 5 - 862 MHz: Typ. 2 dB 950 - 1750 MHz: Typ. 3 dB 1750 - 2400 MHz: Typ. 4,5 dB
SCOPE OF DELIVERY		