


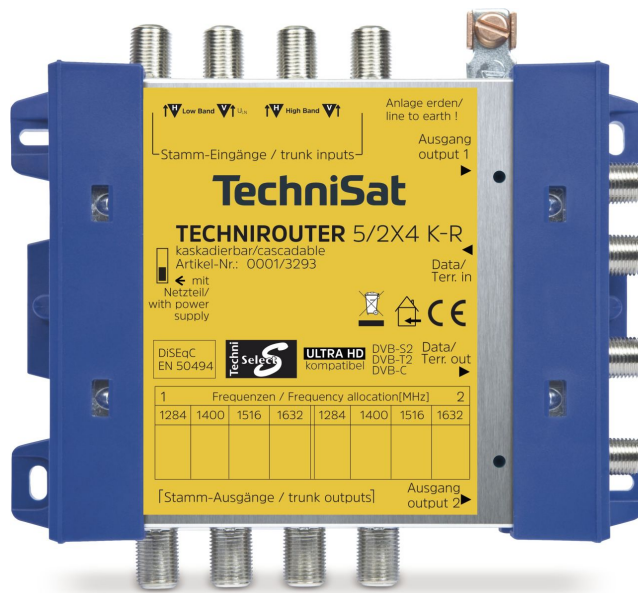

TECHNIROUTER 5/2x4 K-R

TECHNIROUTER cascade, suitable for return channel. Enables the connection of 4 IF levels (satellite blocks) and a terrestrial input for distribution to two cable strands for 4 participants each

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588132931	silber/gelb	0001/3293	422 g	260 g	14 x 13 x 3,2 cm	24,5 x 13,5 x 5,5 cm

AMBIENT OPERATING CONDITIONS

Ambient temperature: -25 ... 55 °C

Humidity: 10 ... 75 %

GENERAL CHARACTERISTICS

Top features: DiSEqC gemäß EN 50494

Top features: 1 Orbitposition ohne Einschränkungen

Top features: Rückkanal-tauglich

Top features: Keine neue Kabelverlegung erforderlich

Top features: Stromsparend ohne Netzteil einsetzbar

Top features: In eine Multischalterverteilung integrierbar

AMPLIFICATION

Sat: 17 ... 22 dB

Terrestrial: -12 dB

POWER SUPPLY

Power consumption: 210 mA @13V (je SCR-Ausgang)

DECOUPLING

Trunks: 45 dB

RECEPTION RANGE

Return path: 5 ... 65 MHz

Terrestrial: 65 ... 862 MHz

Sat: 950 ... 2.150 MHz

SINGLE-CABLE OUTPUT

Output frequency: 5 ... 2.150 MHz

Number of output channels: 2 x 4

Frequency of the output channels: 1284, 1400, 1516, 1632 MHz

Frequency SAT: 950 ... 2.150 MHz

Frequency DVB-T: 65 ... 862 MHz

TECHNICAL DATA

Satellite inputs: 4

Terrestrial input: 1

Number of cable connections: 2

Subscribers per cable: maximal 4

TRANSMISSION LOSS

Sat: 2 ... 5 dB

Terrestrial: 2 ... 3 dB

TUNER

TECHNIROUTER ready: Yes

SCOPE OF DELIVERY

TECHNIROUTER5/2x4 K-R, manual