


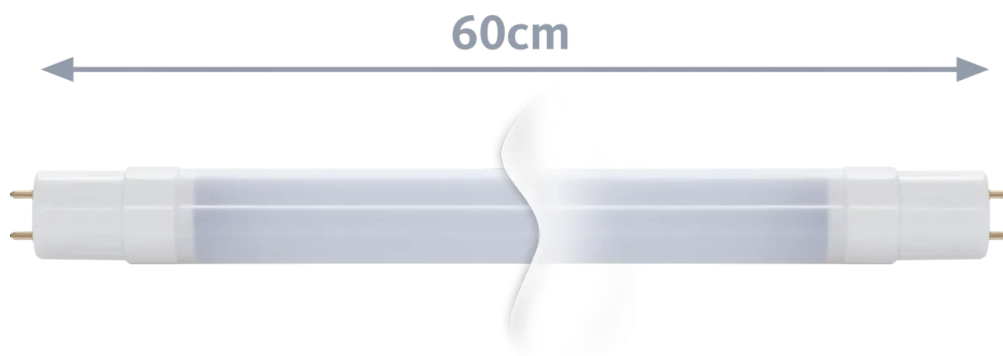

TECHNILUX Tube 60 cm, 9 W, milky

durable und energy saving LED-tube (60 cm) including LED-Starter and VDE-certification

EAN	Item no.	Colour	Weight (Box)	Weight	Device (W x H x D)	Box
4019588617391	0061/7309	white	210 g	170 g	60 x 2,7 x 2,7 cm	65,2 x 2,9 x 2,9 cm

TOP FEATURES

very low power consumption

shock- and jerring proof thanks to LED-technology

long durability

directly 100% light, no heating period

free of quicksilver

LED-starter included

VDE certification

AMBIENT OPERATING CONDITIONS

Ambient temperature: -30 bis 45 °C

ADDITIONAL PRODUCT DATA

bulb fitting: G13/T8

Modell: milky

Protection: IP20

CERTIFICATES

VDE certified security: Yes

CE certified security: Yes

LIFE CYCLE

Rated life: 40.000 h

Set number of switching cycles: > 10.000

PHOTOMETRIC DATA

Luminous flux: > 800 lm

Colour temperature: 3.000

Colour rendering index RA: > 80

Colour designator: 830

Light colour according to EN 12464-1: warm white

Beam angle: 160 °

POWER CONSUMPTION

Energy class: F

annual energy consumption when switched on: 9 kilowatt hour per annum

POWER SUPPLY

Effective output: 9 W

Correlate: herkömml. Leuchtstoffröhre 18 W

Frequency: 50 ... 60 Hz

Nominal voltage: 230 V

Type of current: Alternating current (AC)

SCOPE OF DELIVERY

TechniLux Tube inkl. LED-Starter