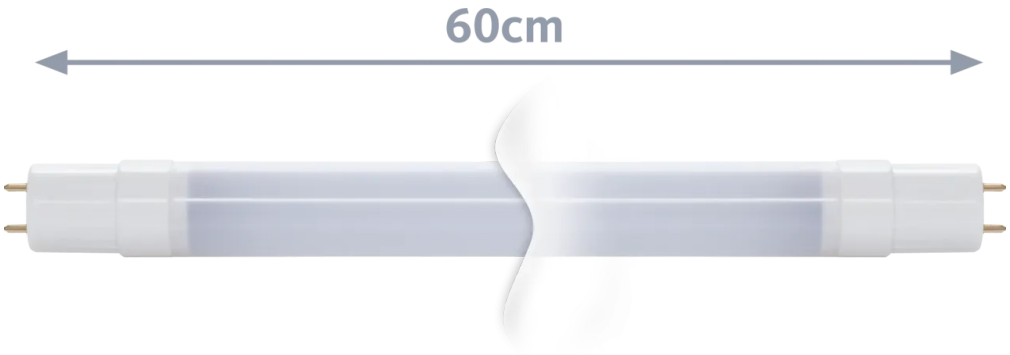


TECHNILUX Tube 60 cm, 9 W, milky

durable und energy saving LED-tube (60 cm) including LED-Starter and VDE-certification

EAN	Item no.	Colour	Weight (Box)	Weight	Device (W x H x D)	Box
4019588617391	0061/7309	white	210 g	170 g	60 x 2,7 x 2,7 cm	65,2 x 2,9 x 2,9 cm

TOP FEATURES

- very low power consumption
- shock- and jerring proof thanks to LED-technology
- long durability
- directly 100% light, no heating period
- free of quicksilver
- LED-starter included
- VDE certification

AMBIENT OPERATING CONDITIONS

- Ambient temperature: -30 bis 45 °C

ADDITIONAL PRODUCT DATA

- bulb fitting: G13/T8
- Modell: milky
- Protection: IP20

CERTFICATES

- VDE certified security: Yes
- CE certified security: Yes

LIFE CYCLE

- Rated life: 40.000 h
- Set number of switching cycles: > 10.000

PHOTOMETRIC DATA

- Luminous flux: > 800 lm
- Colour temperature: 3.000
- Colour rendering index RA: > 80
- Colour designator: 830
- Light colour according to EN 12464-1: warm white
- Beam angle: 160 °

POWER CONSUMPTION

- Energy class: F
- annual energy consumption when switched on: 9 kilowatt hour per annum

POWER SUPPLY

Effective output: 9 W

Correlate: herkömml. Leuchtstoffröhre 18 W

Frequency: 50 ... 60 Hz

Nominal voltage: 230 V

Type of current: Alternating current (AC)

SCOPE OF DELIVERY

TechniLux Tube inkl. LED-Starter